Montage Distanzscheibe



3613 98 135 /-140 /-150
3613 97 140

(english version see page 3)

Montage Distanzscheibe

Abb. 1
Lieferumfang

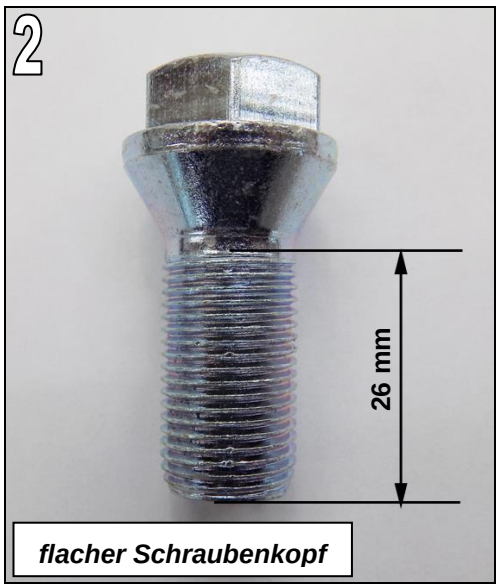



Abb. 2
Kegelbundschraube **M14x1,25 x 26mm** zur Montage der ***Distanzscheibe an Fahrzeug*** verwenden.


Abb. 3
Kegelbundschraube **M14x1,25 x 21mm** zur Montage der ***AC Schnitzer Felge an Distanzscheibe*** verwenden.

Abb. 4
Zuordnung der Befestigungsschrauben.
Flacher Schraubenkopf immer zur Befestigung der Distanzscheibe.

Anzugsdrehmoment für Distanzscheibe: **140NM**
Anzugsdrehmoment für AC Schnitzer Felge: **140NM**



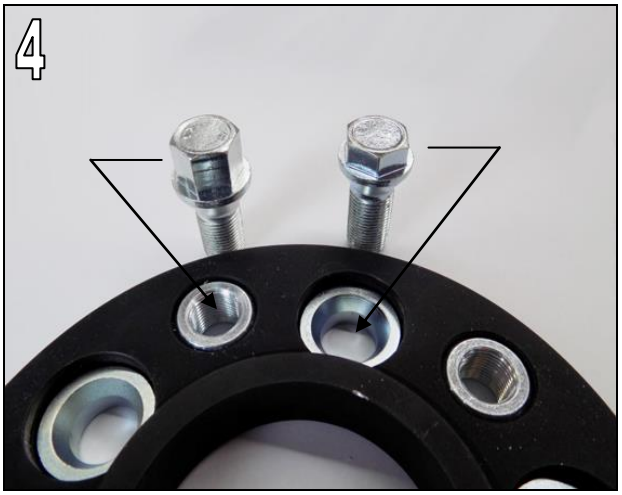

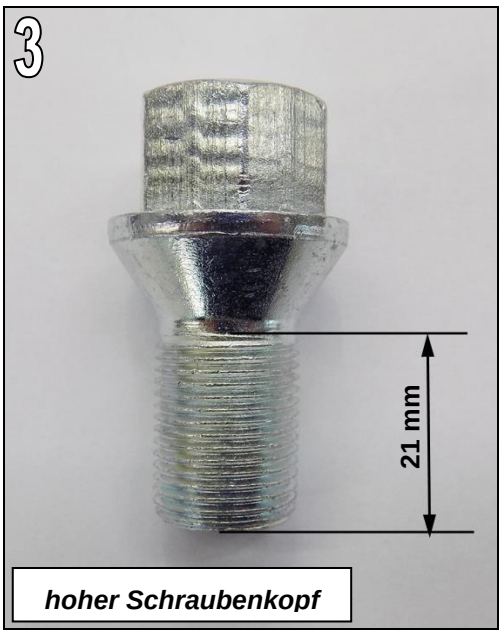

AC Schnitzer - Neuenhofstraße 160 - D - 52078 Aachen - Tel. 0241/5688 -130 Fax -135 / www.ac-schnitzer.de

Fitting Wheel Spacer



3613 98 135 /-140 /-150
3613 97 140

Fitting Wheel Spacer

Fig. 1
Shipment.



Fig. 2
Use fixing screw **M14x1,25 x 26mm** for fitting
wheel spacer at vehicle.

Fig. 3
Use fixing screw **M14x1,25 x 21mm** for fitting
AC Schnitzer wheel at wheel spacer.



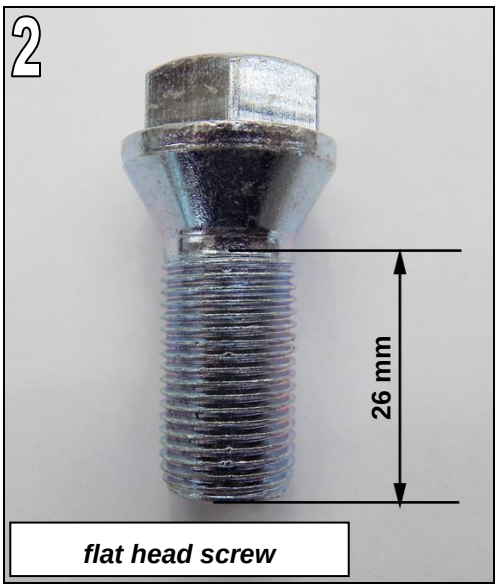


Fig. 4
Assignment the fixing screws.
Flat head screws always fixing the spacer.

Tightening torque for wheel spacer: **140NM**
Tightening torque for AC Schnitzer wheel: **140NM**

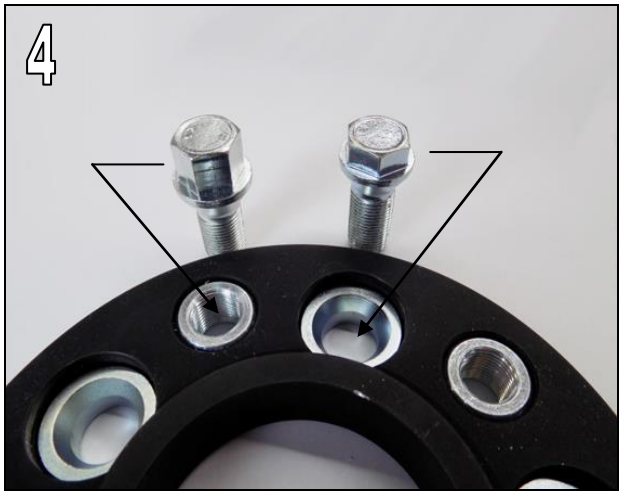

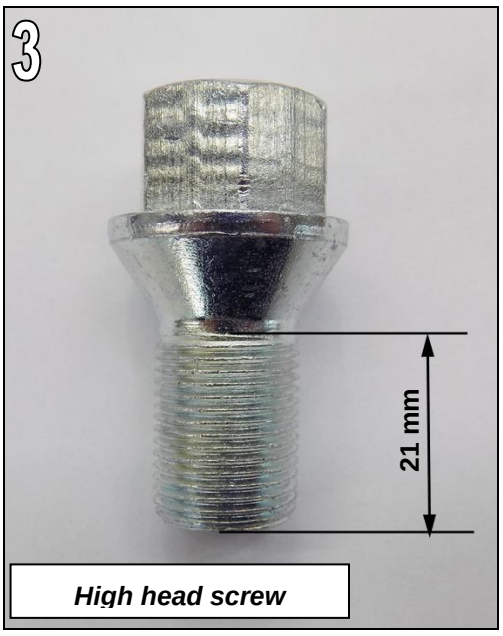

AC Schnitzer - Neuenhofstraße 160 - D - 52078 Aachen - Tel. 0241/5688 -130 Fax -135 / www.ac-schnitzer.de